

GRAPHTEC

Isolated/Universal Input, Standalone Multi-Channel Datalogger

midi LOGGER

GL840-M / GL840-WV / GL240



Setting New Heights in Data Recording

- Flexible input system for wide array of applications
- Wireless LAN capability for remote monitoring and remote datalogging system
- Extended memory capacity using SD memory card
- Maximum sampling interval of up to 10ms



NEW

Multi-Input Model

midi LOGGER GL840-M



NEW

**High Voltage
Withstand Model**

midi LOGGER GL840-WV



NEW

**10-Channel
Portable Model**

midi LOGGER GL240



www.graphotecamerica.com

midi LOGGER

GL840series & GL240



GL840 series

GL240

Setting New Industry Standards for It's Class

Accommodates a wide variety of measurements

Multifunction analog input ports

Contains a highly isolated input mechanism which ensures that signals are not corrupted by noise from other channels. The GL840/240's inputs are suitable for combined measurements from voltage, temperature, humidity, logic, and pulse signals.


4 channels of Logic/Pulse inputs

Supports 4-channel logic or pulse signal inputs. Pulse mode allows cumulative, instant, or rotational values for industrial measurement capability with speed and flow.


Voltage	Ranges from 20mV to 100V	Pulse	4 channels* Accumulating, Instant or RPM
Temp	Thermocouple type: R, S, B, K, E, T, J, N, W RTD types (for GL840 only): Pt100, Pt1000, JPt100	Logic	4 channels*
Humidity	0 to 100%RH - using optional sensor (B-530)	* Requires optional input/output cable (B-513). Select either Pulse or Logic input.	

Large easy-to-read 7-inch wide color LCD(4.3-inch in the GL240)


Carries a clear 7-inch wide TFT color LCD screen (WVGA: 800 x 480 dots) for the GL840, and 4.3-inch wide LCD screen (WQVGA: 480 x 272 dots) for the GL240. Monitoring data can be displayed in waveform or digital form. Parameter settings can be displayed on the screen.



Waveform display (Analog + Digital)



Digital display



Dual display (Current + Past)



Bar chart (Integrated data in a stacked bar chart)

Useful functions

Displays the data by a bar chart

The integrated data that is measured by the digital sensors can be displayed by a bar chart in the GL840 series. Multiple bar chart types are available. Data can also be displayed as a line chart when the GS-TH (Temp/Humidity), GS-DPA-AC with GS-ACxxx (AC current/power) or GS-LXUV (Illuminance/UV) digital sensor is used. The digital sensor can be connected to the GL840 or the GL100-WL. The GL100-WL is used combining with the GL840/GL240. * Firmware ver.1.10 or later.

Alarm output function

Alarm signals can be placed using the four channel alarm output ports based on set conditions for each channel. * Input/output cable (B-513 option) is required to connect the alarm output ports to external buzzer/light mechanism.

USB drive mode

USB drive mode function enables data to be transferred to the PC from GL840/GL240 by drag & drop feature.

Maximum sampling interval of up to 10ms

Provides faster sampling rates for voltage measurements. Up to 10ms sampling speed is achievable when limiting the number of channels in use.

Model	Sampling interval	10ms	20ms	50ms	100ms	200ms	500ms	1s	2s	
		Number of channel								
GL840	Measuring	Voltage	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
		Temperature	N/A	N/A	N/A	Yes	Yes	Yes	Yes	Yes
GL240	Measuring	Voltage	Yes	Yes	Yes	Yes	Yes(10ch)	Yes(10ch)	Yes(10ch)	Yes(10ch)
		Temperature	N/A	N/A	N/A	Yes	Yes(10ch)	Yes(10ch)	Yes(10ch)	Yes(10ch)

* This chart is applicable when the captured data is saved in the GBD binary file format. Limited sampling speed is available when digital sensors and GL100-WL are used as a remote monitoring device.

Built-in 4GB Flash memory with SD card support

The new GL series enables reliable long term measurement with its built-in 4GB flash memory and SD card slot for external storage devices. The SD card slot supports an SDHC memory card of up to 32GB.

Capturing time* (When all 20 or 10 analog channels are being used with Logic/Pulse inputs turned off.)

Model	Sampling	10ms	50ms	100ms	200ms	500ms	1s	10s
GL840	GBD format	31 days	77 days	95 days	108 days	270 days	over 365	over 365
	(20ch) CSV format	3 days	11 days	16 days	21 days	54 days	109 days	over 365
GL240	GBD format	41 days	88 days	103 days	207 days	over 365	over 365	over 365
	(10ch) CSV format	3 days	11 days	16 days	36 days	91 days	182 days	365 days

* Figures are approximate. File size of captured data is 2GB in GBD or CSV file format on this chart. Sampling interval is limited by the number of channels in use. (10ms: 1ch, 50ms: 5ch, 100ms: 10ch) Limited sampling speed is available when digital sensors and GL100-WL are used as a remote monitoring device.

Ring capture function

The most recent data is saved when the memory is configured in ring memory mode. (Number of capturing data is 1000 to 2000000 points)

Relay capture function

Data is continuously saved to multiple files up to 2GB without losing any data until capturing is stopped when the memory is configured in the relay mode.

Hot-swapping the SD memory card

SD card can be replaced during data capturing when the sampling interval is 100ms or slower.

* When the wireless sensor (GL100-WL) is connected, the sample interval among 10, 20, and 50ms cannot be replaced during recording.

Navigation function

Simple to use navigation screen allows setting operation for measurement and wireless LAN adapter in GL840.

3 Types of Power Source

Choose from AC power supply, DC supply* or the rechargeable battery pack.* * DC power drive cable (B-514) and battery pack (B-569) are optional accessories.

Networking features

Web & FTP server function

GL840/GL240 can be controlled externally via a network on the WEB browser, which also supports monitoring and transfer of signals and captured data.

FTP client function

Captured data is periodically transferred to the FTP server for backup.

NTP client function

The clock on the GL840/GL240 is periodically synchronized with the NTP server. * The GL840/GL240 needs to be connected to a LAN environment using the available Ethernet/WLAN ports.

GL840 expands to two models for application specific use

Multi-Input Model midi LOGGER GL840-M



Suitable for temperature measurement with multiple channels.

High Voltage Withstand Model midi LOGGER GL840-WV




Suitable for stacked high voltage battery application, or high-precision temperature measurement.

Expandable up to 200 channels



Standard configuration has 20 analog input channels. It is expandable to 200 channels by adding the optional 20 channel extension terminal base unit (B-566) and input terminal units (B-564 or B-565).

The following shows how a standard configuration is expanded to a 40 channel configuration.

- Terminal unit is removed from the main body of the GL840.
- Extension terminal base unit (B-566) connects to the GL840 using the external cable (B-567).



- Terminal unit snaps onto the extension terminal base unit (B-566).
- The combined extension terminal base set (B-566) and additional input terminals (B-564 or -565) are daisy chained together.



Configuration for additional channels

Number of channels	20 channels	40 channels	100 channels	200 channels
GL840 unit (GL840-M or GL840-WV)	1 set	1 set	1 set	1 set
Connection cable (B-567-05 or -20)	N/A	1 pc	1 pc	1 pc
Terminal base (B-566)	N/A	2 sets	5 sets	10 sets
Input terminal (B-564 or B-565)	N/A	1 set	4 sets	9 sets


* Input terminal blocks for the B-564 and B-565 can be mixed together for combined configurations. However, the maximum voltage and accuracy rating for the setup will be limited to the rating of the B-564.

Offers longer cable for the input terminals

Input terminal blocks can be connected directly (in daisy chain), or using the B-565 cable(s). This allows the input terminals to be placed in separate locations according to the need of the application.

The input terminal and the GL840 main body can be extended by using an extended connection cable.

* If the signal is affected by noise, it may be required to use a slower sampling.




Withstand voltage & Accuracy		Multi-input type (B-564)	Withstand-voltage type (B-565)
Voltage	Input voltage range	20 mV to 100 V	20 mV to 100 V
	Max. voltage (Input - GND)	60 Vp-p	300 Vp-p
Temp	Thermocouple	R, S, B, K, E, T, J, N, W (WRe5-26)	
	RTD (Resistance Temp Detector)	Pt100 (IEC751), Pt1000 (IEC751), JPt100 (JIS)	
Accuracy	Voltage	± 0.1% of F.S.	±(0.05% of FS + 10μV)
	Temperature*	± 1.55 °C	± 1.1 °C

* Accuracy rating for K-type thermocouple at 100°C includes reference junction compensation. Accuracy varies by temperature levels and thermocouple types.

Three types of input systems enable measurement of various signals

Along with the basic analog signal, Logic/Pulse, and digital sensors can be all connected to monitor a variety of measurements.



Support digital sensors

Digital sensors and input terminal/adapters for the GL100 connect to the GL840 directly.

Temp/Humidity GS-TH	Acceleration/Temp GS-3AT	Carbon Dioxide GS-CO2	Illuminance/UV GS-LXUV	Voltage/Temp GS-4VT
Thermistor adapter GS-4TSR	Thermistor	AC current sensor adapter GS-DPA-AC*	AC current sensor	Extension cable**

* Supports up to two AC current sensors.
** Allows only one extension cable per port.

Dual port adapter connects up to two sensors for simultaneous interface



High performance software with useful functions for the PC (GL100_240_840-APS)

GL840 series
GL240

WLAN, Ethernet or USB

PC (Software)

- Supports GL840, GL240, GL100**
 Up to 10 units of GL840, GL240 and GL100 can be connected to 1 PC simultaneously. Up to 1000 channels are supported.
- Controls settings for GL840, GL240, GL100**
- Various measurement screen**
 Displays data in Y-T waveform, digital monitoring, statistical calculation result, bar chart*. * Software ver.1.10 or later. The direct-Excel function enables captured data to be written directly to an Excel file.
- File operation**
 Data captured in multiple files can be merged into a single file. Using the combine function, data can be imported as a new channel overlaying on top of each other. The bind function connects the data in a time axis. When using the relay capture mode, the bind feature will append multiple files together into one large, continuous file.

- Useful functions**
- Scheduling function**
 Create a schedule for your monitoring to start and stop at selected time, and set an automatic measurement schedule.
- Group function**
 Multiple units can be managed, such as controlling start or stop simultaneously. Data captured by each unit is saved in a single file.
- Data format conversion**
 Converts the GBD (Graphtec Binary Data) format to CSV format. The file size is reduced using the compression function saving a value at particular time point of a specified interval. Or, it will save the average, maximum, or minimum values from the specified time interval as the highlighted values.

Wireless Measurement Using WLAN (option)

Wireless LAN option enables the wireless communication with other devices. Connects to the GL100-WL wireless unit remotely when set as an access point. When set as a station, PC and smart devices will be able to access the WLAN unit directly.

■ Combining GL100-WL and GL240/GL840

GL100-WL can now be connected to the GL840 or GL240 as a remote sensor using the WLAN feature. You can expand your measurement variety by adding the sensors available on the GL100-WL unit. The measured value will then appear in a single file along with the measurement values from the GL840/GL240 main inputs. GL840/GL240 will now take in direct information from the GL100-WL units.




Sensors and input terminals/adapters for the GL100




■ Communication with PC or Smart device

GL840 and GL240 units can be connected to a LAN (Local Area Network) via a WLAN access point. Measured data can be monitored and controlled via a PC or a smart device using the application software. Configuration of GL840/GL240 can be set via the network. Available functions vary by the network configuration.

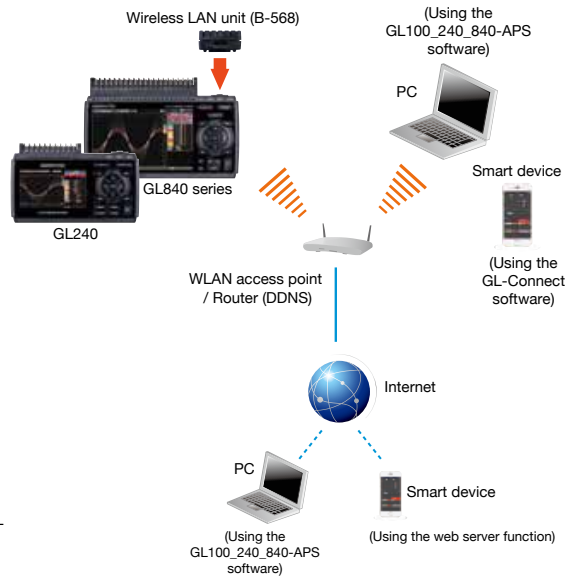

High quality performance and measurement software with useful functions for PC & smart devices

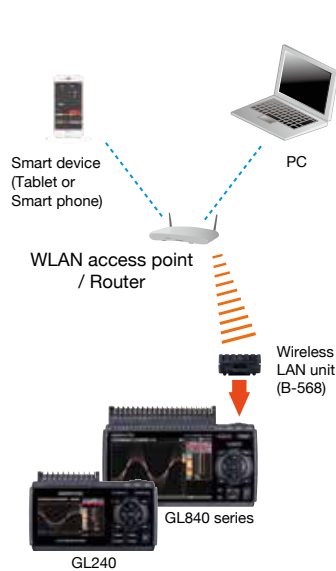

For PC (GL100_240_840-APS)

Software for the PC is included as a standard accessory.

- Monitor and save captured data remotely
- Control the GL840/GL240
- Additional functions

• Scheduling function • Group function • Data format conversion • File operation And more!

For Smart device (GL-Connect)

Apps for the smart devices are available on the Android OS and iOS platforms. Download them free from the individual stores.

■ Monitoring captured data

Real time captured data can be displayed as digital values in real time on the smart device apps. The saved data on the GL840/GL240 main body can also be displayed in waveform display format.

* Captured data will not be saved on the smart device.

■ Set and control simple functions

Dedicated control features allow remote start and stop, setting the sampling interval, and setting the alarm conditions.

■ Control the settings remotely

Web server function of the GL840/GL240 allows remote control and monitoring using this application.



* Please type "graphtec" to search for the app.

GL840 Main unit specifications. Table with columns: Item, Description. Rows include Model number (GL840-M), Number of analog input channels (20 channels), Type of analog input terminal, External input/output, Sampling interval, Trigger, Alarm function, Pulse input function, Calculation function, Search function, Interface to PC, Storage device, Capturing mode, Replay data, Scaling, Action during data capture, Display (LCD), Operating environment, Power source, Power consumption, External dimensions, Weight.

Software specifications for PC. Table with columns: Item, Description. Rows include Model name (GL100_240_840-APS), Supported OS (Windows 10, 8.1, 8, 7, Vista), Supported device (GL840, GL240), Functions (Control the GL series), Supported units & channels (Up to 1000 channels), Settings control (Input condition), Capturing data (Saved to PC), Displayed information (Y-T waveform), File operation (Converting data format), Warning function (Send e-mail), Statistical calculation (Maximum, Minimum), Report function (Creates the daily report).

Software specifications for Smart device. Table with columns: Item, Description. Rows include Model name (GL-Connect), Supported OS (Android 4.1 to 4.4, iOS 7/8), Supported device (GL840, GL240), Functions (Control the GL series), Supported units (Up to 10 units), Settings control (Start/Stop), Capturing data (Saves captured data), Displayed information (Data captured in real time).

Wireless LAN unit (option) specifications. Table with columns: Item, Description. Rows include Model number (B-568), Supported device (GL840, GL240), Communication method (Wireless communication), Installed location (Attaches to the SD card slot), Function (Access Point mode), Connected number of GL100-WL (GL840: Up to 5 units).

GL840 Analog input specifications. Table with columns: Item, Description. Rows include Model number (GL840-M), Input method (All channels isolated), Type of input terminal (Screw terminal), Measurement range (Voltage, Thermocouple, RTD, Humidity), Filter (Off, 2, 5, 10, 20, 40), Measurement accuracy (Voltage, Temperature).

Temperature (Thermocouple) table. Table with columns: Type, Measurement range (TS: Temp Sense), Measurement accuracy. Rows include R, S, B, K, E, T, J, N, W, R.J.C. types.

Temperature (RTD) table. Table with columns: Type, Measurement range (TS: Temp Sense), Measurement accuracy. Rows include Pt100, Pt1000, JPt100 types.

A/D converter table. Table with columns: Maximum input voltage, Max. voltage (withstand), A/D converter description (Sigma-Delta type).

- *1. Input/Output cable for GL (option B-513) is required to connect the signal.
- *2. Input signal: Voltage range: Up to 24V (common ground).
- *3. Output signal: Open collector (pull-up to 5V by 10k resistor).
- *4. Minimum interval varies by number of channels used.
- *5. Output port can be specified in each input channel.
- *6. The built-in Flash memory is available for units with serial numbers C604xxxxx or later.
- *7. SD memory card cannot be used on the second slot while the wireless LAN unit is used.
- *8. Size of the capture data will be limited to 1/3 of available memory.
- *9. Display mode is switched every time the dedicated key is pressed.
- *10. Rating under maximum power consumption using the AC adapter, with LCD display on, and battery pack(s) being charged.
- *11. Excludes AC adapter and battery pack.
- *12. The terminal "b" for using the RTD is connected each other across all channels.
- *13. If the specifications of the temperature sensor is lesser or greater than the selected measurement range, GL840 can measure up to the specifications of the sensor.
- *14. Subject to the following conditions: Room temperature is 23°C ± 5°C.
- *15. Wire size of thermocouple used is 0.32mm diameter in the T or K type and 0.65mm diameter in other types.
- *16. Supports 3-wire type sensor.

Options and Accessories. Table with columns: Item, Model number, Description. Rows include Input terminal (B-564, B-565), Base unit for input terminal (B-566), Connection cable (B-567-05), Wireless LAN unit (B-568), Battery pack (B-569), Bracket for DIN rail (B-570), Bracket for DIN rail (extension terminal) (B-540), Input/Output cable for GL series (B-513), DC drive cable (B-514), Humidity sensor (B-530), Shunt resistor (B-551-10), AC power adapter (ACADP-20), Temp & Humidity sensor (GS-TH), Illuminance & UV sensor (GS-LXUV), Carbon Dioxide (CO2) sensor (GS-CO2), Acceleration & Temp sensor (GS-3AT), Thermistor input terminal (GS-4TSR), Thermistor sensor (Normal type) (GS-103AT-4P), Thermistor sensor (Ultrathin type) (GS-103JT-4P), AC current sensor adapter (GS-DPA-AC), AC current sensor (50A) (GS-AC50A), AC current sensor (100A) (GS-AC100A), AC current sensor (200A) (GS-AC200A), Voltage & Temp input terminal (GS-4VT), Module extension cable (GS-EXC), Dual port adapter (GS-DPA).

GL240 Main unit specifications		
Item	Description	
Number of analog input channels	10 channels	
External input/output (*1)	Trigger or Sampling (1 channel), Logic/Pulse (4 channels)	
Sampling interval	10 ms to 1 hour (10ms to 50ms: voltage only) (*4), External signal	
Time scale of waveform display	1sec. to 24 hour /division	
Trigger, Alarm function	Trigger action	Start or stop capturing data by the trigger
	Repeat action	Off, On (auto rearm)
Condition Setting	Trigger source	Start: Off, Measured signal, Alarm, External, Clock, Week or Time Stop: Off, Measured signal, Alarm, External, Clock, Week or Time
	Combination	Combination: OR or AND
	Analog signal	Rising (High), Falling (Low), Window-in, Window-out Logic signal: Pattern (combination of each input signal in high or low) Pulse (number of count): Rising (High), Falling (Low), Window-in, Window-out
Alarm output	Outputs a signal when alarm condition occurs in the input signal (*5)	
Pulse input function	Rotation count (RPM)	Counts the number of pulses per sampling interval and converts to rpm (rotations per minute), Number of pulses for one rotation may be set to 50, 500, 5000, 50k, 500k, 5M, 50M, 500M rpm/F.S. (rpm./Full Scale)
	Accumulating count	Accumulates the number of pulses from the start of measurement 50, 500, 5000, 50k, 500k, 5M, 50M, 500M C/F.S. (Counts/Full Scale)
	Instant count	Counts the number of pulses per sampling interval 50, 500, 5000, 50k, 500k, 5M, 50M, 500M C/F.S. (Counts/Full Scale)
Calculation function	Between channels	Addition, Subtraction, Multiplication, and Division for analog input
	Statistical	Select two calculations from Average, Peak, Maximum, Minimum, RMS
Search function	Search for analog signal levels, values of logic or pulse or alarm point in captured data	
Interface to PC	USB (Hi-speed), WLAN (using B-568 option)	
Storage device	Internal	Built-in 4GB Flash Memory (*6)
	External	One SD card slot (Supports SDHC memory card, up to 32 GB) (*7)
	Saved contents	Captured data, Setting conditions, Screen copy
Capturing mode	Mode: Normal, Ring, Relay Ring: Saves most recent data (Number of captured data: 1000 to 2000000 points) (*8) Relay: Saves data to multiple files without losing data until data capturing is stopped	
Replay Data	Replays captured data that was saved in the GL240 (in BGD or CSV format)	
Scaling (Engineering unit) function	Measured value can be converted to the specified engineering unit • Analog voltage: Converts using four reference points (gain, offset) • Temperature: Converts using two reference points (offset) • Pulse count: Converts using two reference points (gain)	
Action during data capture	• Displaying part data (using dual display mode (Current + Past data)) • Hot-swapping the SD memory card • Saving data in between cursors	
Display (LCD)	Size	4.3-inch TFT color LCD (WQVGA: 480 x 272 dots)
	Language	English, French, German, Chinese, Korean, Russian, Spanish, Japanese
	Information (*9)	Waveform in Y-T with digital values, Waveform only, Digital value, Digital values and statistics values, Bar chart
Operating environment	0 to 45 °C, 5 to 85 % RH (non condensed) (When operating with battery pack 0 to 40 °C, charging battery 15 to 35 °C)	
Power source	AC adapter	100 to 240 V AC, 50/60 Hz (1 pc of adapter is attached as standard accessory)
	DC power	8.5 to 24 V DC (DC drive cable (option B-514) is required)
Battery pack	Mountable battery pack (battery pack (option B-569): 7.2V DC, 2900mAh)	
Power consumption (*10)	Max. 36 VA	
External dimensions (W x D x H)	Approx. 188 x 117 x 42 mm (Excluding projections)	
Weight (*11)	500 g	

Software specifications for PC

Item	Description	
Model name	GL100_240_840-APS	
Supported OS	Windows 10, 8.1, 8, 7, Vista (32/64-bit edition)	
Supported device	GL840 (USB, Ethernet, WLAN), GL240 (USB, WLAN), GL100 (USB, WLAN)	
Functions	Control the GL series, Real-time data capture, Replay data, and Data format conversion	
Supported units & channels	Up to 1000 channels total, Up to 4 groups (number of units is limited by mode)	
Settings control	Input condition, Capturing condition, Trigger/Alarm condition, Report, etc.	
Capturing data	Saved to PC	Saves captured data in real time (in GBD binary or CSV format)
	Saved to GL unit	Saves to the SD memory card (in GBD binary or CSV format)
Displayed information	Y-T waveform, Digital values, Report, X-Y graph (specified period of data, data replay only), Two display for the current and past, Statistical calculation, and Integrated value in a bar chart	
File operation	Converting data format to CSV from GBD binary, merge multiple data files in the time axis or as an additional channel	
Warning function	Send e-mail to the specified address when the alarms occur	
Statistical calculation	Maximum, Minimum, and Average during data capturing	
Report function	Creates the daily or monthly report automatically	

Software specifications for Smart device

Item	Description	
Model name	GL-Connect	
Supported OS	Android 4.1 to 4.4, iOS 7/8	
Supported device	GL840 (WLAN), GL240 (WLAN), GL100 (WLAN)	
Functions	Control the GL series, Display measured data in waveform or digital value	
Supported units	Up to 10 units	
Settings control	Start/Stop, Sampling interval	
Capturing data	Saves captured data in the GL main body (data cannot be saved in the smart device)	
Displayed information	Data captured in real time by digital value, Replay the data stored in the GL body by the waveform	

Options and Accessories

Item	Model number	Description
Wireless LAN unit	B-568	WLAN adapter, IEEE802.11b/g/n
Battery pack	B-569	Rechargeable Lithium-ion battery (7.2 V, 2900mAh)
Input/Output cable for GL series	B-513	2 m long (no clip on end of cable)
DC drive cable	B-514	2 m long (no clip on end of cable)
Humidity sensor	B-530	With 3 m long signal cable (with power plug)
Shunt resistor	B-551-10	250 ohms (it converts the signal to the "1-5V" from the "4-20mA")
AC power adapter	ACADP-20	Input: 100 to 240 V AC, Output: 24 V DC

- Due to the possibility of equipment or PC failure, the data files on the instrument will not be guaranteed to be held on the memory. Please make a backup of data whenever possible to avoid data loss.
- Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.
- Specifications are subject to change without notice. For more information about product, please check the web site or contact your local representative.

⚠ For using equipment in correctly and safely : Before using it, please read the user manual and then please use it properly in accordance with the description.
 • To avoid malfunction or an electric shock by current leakage or voltage, please ensure a ground connection and use according to the specification.

GRAPHTEC

Graphtec America, Inc.

17462 Armstrong Ave. Irvine, CA 92614
 Sales: 949.860.4186 Tech Support: 949.860.4175
 Email: inst.sales@graphtecamerica.com

Website www.graphtecamerica.com

GL240 Analog input specifications			
Item	Description		
Input method	All channels isolated balanced input(*12), Scans channels for sampling		
Type of input terminal	Screw terminal (M3 screw)		
Measurement range	Voltage	20, 50, 100, 200, 500 mV, 1, 2, 5, 10, 20, 50, 100 V, and 1-5V F.S. (Full Scale)	
	Thermocouple	Type: K, J, E, T, R, S, B, N, and W (WRε5-26)	
	Humidity	0 to 100 % RH - using the humidity sensor (option B-530)	
Filter	Off, 2, 5, 10, 20, 40 (moving average in selected number)		
Measurement accuracy (*13)	Voltage	± 0.1% of F.S. (Full Scale)	
Temperature (Thermocouple) (*14)	Type	Measurement range	Measurement accuracy
		(TS: Temp Sense)	
	R	0 ≤ TS ≤ 100 °C	± 5.2 °C
		100 < TS ≤ 300 °C	± 3.0 °C
		300 < TS ≤ 1600 °C	± (0.05% of rdg. + 2.0 °C)
	S	0 ≤ TS ≤ 100 °C	± 5.2 °C
		100 < TS ≤ 300 °C	± 3.0 °C
		300 < TS ≤ 1760 °C	± (0.05% of rdg. + 2.0 °C)
	B	-400 ≤ TS ≤ 600 °C	± 3.5 °C
		600 < TS ≤ 1820 °C	± (0.05% of rdg. + 2.0 °C)
	K	-200 ≤ TS ≤ -100 °C	± (0.05% of rdg. + 2.0 °C)
		-100 < TS ≤ 1370 °C	± (0.05% of rdg. + 1.0 °C)
	E	-200 ≤ TS ≤ -100 °C	± (0.05% of rdg. + 2.0 °C)
		-100 < TS ≤ 800 °C	± (0.05% of rdg. + 1.0 °C)
T	-200 ≤ TS ≤ -100 °C	± (0.1% of rdg. + 1.5 °C)	
	-100 < TS ≤ 400 °C	± (0.1% of rdg. + 0.5 °C)	
J	-200 ≤ TS ≤ -100 °C	± 2.7 °C	
	-100 < TS ≤ 1100 °C	± 1.7 °C	
	100 < TS ≤ 1100 °C	± (0.05% of rdg. + 1.0 °C)	
N	-200 ≤ TS < 0 °C	± (0.1% of rdg. + 2.0 °C)	
	0 ≤ TS ≤ 1300 °C	± (0.1% of rdg. + 1.0 °C)	
W	0 ≤ TS ≤ 2000 °C	± (0.1% of rdg. + 1.5 °C)	
	R.J.C.	± 0.5 °C	
A/D converter	Sigma-Delta type, 16 bits (effective resolution: 1/40000 of the measuring full range)		
Maximum input voltage	Between (+) / (-) terminal	20 mV to 1 V range: 60 Vp-p	
	Channels (-) / (-)	2 V to 100 V range: 110 Vp-p	
	Channel / GND	60 Vp-p	
Max. voltage (withstand)	Between channels	350 Vp-p (1 minute)	
	Channel / GND	350 Vp-p (1 minute)	

Wireless LAN unit (option) specifications

Item	Description	
Model number	B-568	
Supported GL series	GL840, GL240	
Communication method	Wireless communication (using radio waves in the 2.4GHz band)	
Supported WLAN system	IEEE802.11b/g/n WPS: Push button or PIN method Security protocols: WEP64, WEP128, WPA-PSK/WPA2-PSK, AKIP/AES Communication distance: Approx. 40m (depending on the conditions of radio communication)	
Installed location	Attaches to the SD card slot on the GL840/GL240 (*7)	
Function	Access Point mode: Communicate with the GL100-WL as a remote sensor (captured data in the GL100-WL is transferred to GL840/GL240) Station mode: Communicate with PC or Smart device (control GL840/GL240 and transfer the data from GL840/GL240)	
Connected number of GL100-WL	GL840: Up to 5 units of the GL100-WL GL240: 1 unit of the GL100-WL	

1. Input/Output cable for GL (option B-513) is required to connect the signal.
2. Input signal:
 - Voltage range: Up to 24V (common ground)
 - Signal type: Voltage, Open collector, Contact (relay)
 - Threshold: Approx. ± 2.5 V (Hysteresis, Approx. 0.5V (2.5V to 3V))
3. Output signal: Open collector (pull-up to 5V by 10kΩ resistor)
 - <Maximum rating of the output transistor>:
 - Voltage: Max. 30V, • Current: Max. 0.5A, • Collector dissipation: Max. 0.2W
4. Minimum interval varies by number of channels used.
5. Output port can be specified in each input channel.
6. The built-in Flash memory is available for units with serial numbers C604xxxxx or later. Please refer to the website for more information.
7. SD memory card cannot be used on the second slot while the wireless LAN unit (option B-568) is used.
8. Size of the capture data will be limited to 1/3 of available memory.
9. Display mode is switched every time the dedicated key is pressed. In magnified digital value mode, the displayed channel number can be specified. In the waveform display mode, the changing of the time scale will be effective from the point of the next displayed data.
10. Rating under maximum power consumption using the AC adapter, with LCD display on, and battery pack being charged.
11. Excludes AC adapter and battery pack.
12. The terminal "b" for using the RTD is connected each other across all channels.
13. Subject to the following conditions:
 - Room temperature is 23 °C ± 5 °C.
 - When 30 minutes or more have elapsed after power was turned on.
 - Filter is set to 10.
 - Sampling rate is set to 1 sec, using 10-channel.
 - GND terminal is connected to ground.
14. Wire size of thermocouple used is 0.32mm diameter in the T or K type and 0.65mm diameter in other types.



KE10176 GR Vol.3